

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/036924 A2

- (51) International Patent Classification⁷: **H04Q**
- (21) International Application Number: PCT/US2003/032584
- (22) International Filing Date: 16 October 2003 (16.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/418,342 16 October 2002 (16.10.2002) US
- (71) Applicant (for all designated States except US): **ANDREW CORPORATION** [US/US]; 13595 Dulles Technology Drive, Suite 200, Herndon, VA 20171 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KENNEDY, Joseph, P., Jr.** [US/US]; 11127 Elmview Place, Great Falls, VA 22066 (US). **GRAVELY, Thomas, B.** [US/US]; 11693 Hanna Overlook Court, Herndon, VA 20170 (US). **CARLSON, John, P.** [US/US]; 12006 Trossack Road, Herndon, VA 20170 (US). **ALLES, Martin** [US/US]; 2421 Williams Avenue, Vienna, VA 22180 (US).
- (74) Agent: **COMTOIS, Mark, C.**; Duane Morris LLP, Suite 700, 1667 K Street, N.W., Washington, DC 20006 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A SYSTEM AND METHOD FOR ENHANCING THE ACCURACY OF A LOCATION ESTIMATE

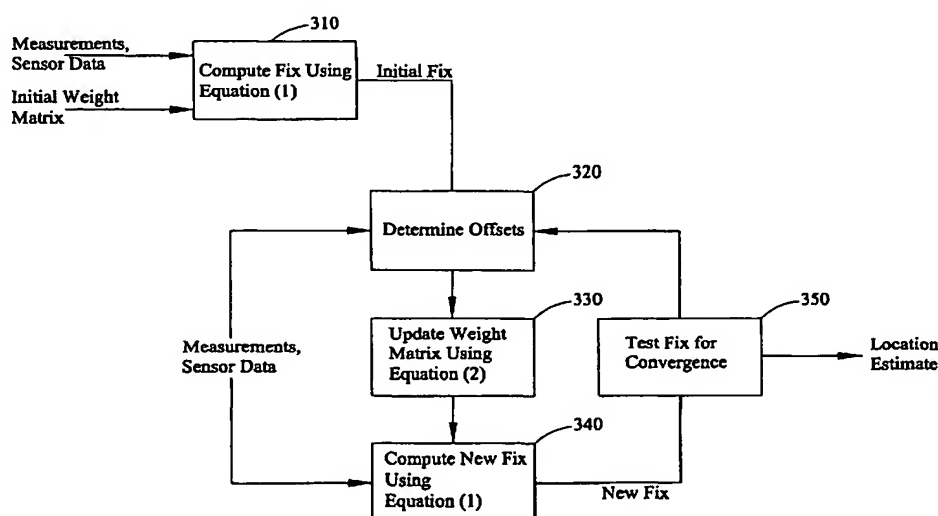

(57) Abstract: A method for enabling a system to enhance the accuracy of a location estimate modifies weights in a weight matrix associated with receiver station measurements in parallel with successive refinements of the location estimate. In a typical location estimation scenario, several receiving stations simultaneously derive measurements of a signal from the emitter. Any one of these measurements is in general some function of the emitter location and the receiving station location. The aggregate of these measurements is often in excess of the minimum number of measurements required to provide an estimate of the emitter location. Where such an excess exists, the method proceeds by modifying the weights associated with the measurements in parallel with successive refinements of the location estimate. The method can be implemented over various cellular protocols with a consistent and significant enhancement in the accuracy of location estimates.

GRA26 006

A SYSTEM AND METHOD FOR ENHANCING THE ACCURACY OF A LOCATION ESTIMATE

CROSS REFERENCES

[0001] The present application is co-pending with and claims priority benefit of provisional application entitled "Geolocation of Mobile Appliances", Appl. S.N. 60/418,342 and filed on October 16, 2002, the entirety of which is hereby incorporated herein by reference.

[0002] The present application is related to and concurrently filed with applications titled "A NETWORK OVERLAY GEO-LOCATION SYSTEM WITH SMART ANTENNAS AND METHOD OF OPERATION" SN #, "WIRELESS COMMUNICATION NETWORK MEASUREMENT DATA COLLECTION USING INFRASTRUCTURE OVERLAY-BASED HANDSET LOCATION SYSTEMS" SN #, "NETWORK OVERLAY LOCATION SYSTEM AND METHOD FOR AIR INTERFACE WITH FREQUENCY HOPPING" SN #, "A SYSTEM AND METHOD FOR ESTIMATING THE MULTI-PATH DELAYS IN A SIGNAL USING A SPATIALLY BLIND ANTENNA ARRAY, SN#, and "SYSTEM AND METHOD FOR OPERATING A NETWORK OVERLAY GEO-LOCATION SYSTEM WITH REPEATERS" SN #, filed October 16, 2003, the entirety of each of these applications is incorporated herein by reference.

BACKGROUND

[0003] In a typical location estimation scenario, several receiving stations simultaneously derive measurements on the emitter signal, the emitter being a wireless transmitter, a mobile appliance such as a mobile phone, Personal Digital Assistant ("PDA"), or personal computer with wireless capability. Ideally, any one of these measurements is a function only of the emitter location \vec{P} , the receiving station locations \vec{S}_j (where the subscript j denotes the station), and the antenna configurations at the

GRA26 006

receiving stations. A given receiving station may attempt to derive the bearing or Angle of Arrival ("AOA") at which the emitter is located. A different receiving station may attempt to derive the Time Of Arrival ("TOA") of the emitter's signal. Some receiving station pairs may attempt to derive the Time Difference Of Arrival ("TDOA") of the emitter signal between the station pair. Other receiving station pairs may attempt to compute the Frequency Difference Of Arrival ("FDOA") of the emitter signal between the station pair. The form of the measurements is not restricted to the above; certain receiving stations may derive a multiplicity of the measurements indicated or other more exotic measurements.

[0004] Most prior art location estimating systems have more receiving stations in place than minimally required. For example, if all receiving stations were to use TOAs to determine the emitter position, three stations would suffice in the ideal case. For a perfect estimate in this scenario, the three TOAs will be exactly correct (perfect) measurements. For receiving station using AOA, two stations would suffice in the ideal case. Where the number of receiving stations used in the estimate is above the ideal number, the estimate becomes an overdetermined solution. The fact that such perfect measurements are never available in practice necessitates the use of an excess of receiving stations and a resulting excess of measurements and an overdetermined solution. Given the excess measurements, a location estimate is derived to best fit the measurements.

[0005] In a mixed mode system, a combination of TOAs, TDOAs, AOAs, FDOAs and other measurements are combined to estimate the emitter position. Whether mixed mode or not, the same principle of using (or attempting to use) an excess of receiving stations is applied to generate a more reliable estimate of the emitter location.

[0006] In most prior art systems, the mathematical approach taken to derive a location from such an excess of measurements assumes that each of the measurements is the perfect measurement corrupted with Gaussian noise with some known statistics. A more detailed explanation of this approach can be found in M. Wax, "Position location from sensors with position uncertainty", *IEEE Trans. Aero., Elect. Syst.* AES-19, no. 2

GRA26 006

(Sept. 1983), 658-662; D.J. Torrieri. "Statistical Theory of Passive Location Systems", *IEEE Trans. Aerosp. Electron. Syst. AES-20*, no. 2 (Mar. 1984), 183-198; Y.T. Chan and K.C. Ho, "A simple and efficient estimator for hyperbolic location", *IEEE Trans. Signal Proc.* 42, no. 8 (Aug. 1994), 1905-1915; W.H. Foy. "Position location solutions by Taylor series estimation", *IEEE trans Aerosp. Electron. System AES-12*, no. 2 (Mar. 1976), 187-194; R.G. Stansfield, "Statistical theory of DF fixing", *Journ. IEE* 94, part IIIa (Oct. 1947), 762-770; the entirety of each is herein incorporated by reference. This technique has a long and established history and serves as the bedrock of location estimation.

[0007] In actual systems, modeling the receiver station measurement as a perfect signal corrupted by noise is accurate only in a small minority of cases. The reason for this is that measurements (of any of the types indicated earlier) typically have biases which are rarely (if ever) reflected in the noise statistics. This measurement bias may stem from a variety of factors. One source of bias is instrumentation error. Another source of bias is signal multipath where a delayed signal, a reflection of the original signal, masquerades as the desired signal.

[0008] In determining a location estimate, it is convenient to associate a weight with each measurement. This translates mathematically to either individual weights or a matrix that expresses inter-relationships among the measurements. Given that the biases are unknown and may (in the case of multipath) be functions of the emitter location \vec{P} , a direct mathematical solution using both the initial weights and unknown biases is impossible: there are an infinite number of solutions. On the other hand, all known solution techniques that ignore the measurement bias result in an estimate that is itself biased. Since the location estimate is derived by a mathematical weighting of each measurement, the weights applied to each measurement have a strong effect on the error in the location estimate. Ideally, the weights applied to good measurements should always be larger than those applied to biased measurements.

[0009] Several prior art attempts have been made to address the issue of biased measurements and are described in detail in M.P. Wylie and J. Houtzman, "The non-line

GRA26 006

of sight problem in mobile location estimation". *Proc. IEEE 5th International Conf. on Universal Personal Communications*, vol. 2 (Oct. 1996), 827-831; L.Cong and W.Xuang, "Non-Line-of-Sight Error Mitigation in TDOA mobile location" *Proc. IEEE Global Telecommunications conference vol.1* (2001), 680-684; P.C. Chen, "A non-line-of-sight error mitigation algorithm in location estimating" *Proc. IEEE Conf. on wireless Communications Networking*, vol. 1 (1999), 316-320; and N.J. Thomas, D.G.M. Cruickshank and D.I.Laurenson, "Performance of a TDOA-AOA hybrid mobile location system" *3G Mobile Communication Technologies Conf. Proc. 1* (Mar. 2001), 216-220, all of which are incorporated herein by reference. These references describe approaches that identify the offending measurements and then either eliminate such measurements or model the offending measurements with a distribution different from the traditional approach. Some of these methods additionally require a large number of samples of a particular measurement to create a time-history of the measurement.

[0010] A major problem with the prior art techniques is that in practical systems the differentiation between biased and non-biased measurements is never clear-cut. Unlike in purely academic simulations, real life data reveals a continuum ranging from near perfect measurements to measurements with large biases. Experimentation with schemes that attempt to isolate a particular biased measurement have shown that such schemes rarely work. These approaches have great difficulty in identifying the offending measurements when more than one receiving station is in error.

[0011] For purposes of this disclosure, dominant measurements are those measurements that most strongly influence the location estimate. When the dominant measurements have a smaller bias than the remaining measurements, the estimate generated by any of the traditional prior art solution techniques mentioned previously is a better estimate than the estimate generated by the measurements with larger bias. That is, the estimate is far from perfect, but is skewed to favor the dominant measurements that within this scenario are described as having a small bias. In practice, and especially when a fair excess of measurements is available, the dominant measurements actually have a smaller bias.

GRA26 006

[0012] One reason for this is that the set of low bias measurements have a greater degree of self-coherence (less variation or greater mutual agreement) with respect to the mathematics that generates the estimate; hence, they are more likely to dominate the estimate. The skew in the estimate makes the non-dominant measurements have a larger offset with respect to the estimate than the dominant measurements. It is important to note that one or more non-dominant measurements may have a large weight. The self-coherence of several lower weight measurements can thus dominate the location estimate, over-riding the non-dominant high weight measurement that is possibly in error.

[0013] The disclosed subject matter capitalizes on this fact to adjust the weights applied to the measurements by the offsets from the hypothetical measurements, with the assumption that at each iteration the location estimate is exact. Thus, the relative weights applied to the dominant measurements are increased with respect to the non-dominant measurements. This process is recursively refined to generate further improvements in the location estimate. The dominant measurements may or may not be a majority of the measurements since only a few high weight measurements may dominate the estimate. Conversely several lower weight measurements may prove dominant in terms of the location estimate, and hence their weights may increase in the next iteration of the process, while the weights applied to the other measurements may decrease.

[0014] The method disclosed makes no attempt to determine the offending measurements. The goal, rather, is to improve the location estimate. However, the method can be used to identify the biased measurements subsequent to refining the location estimate.

[0015] Therefore, it is an object of the present subject matter to obviate the deficiencies of the prior art and present a novel method and system for recursively refining location estimates by accounting for receiver bias where an overdetermined solution exists.

[0016] It is also an object of the present subject matter to present an improved method for refining a geo-location estimate of a wireless transmitter emitting a signal that

GRA26 006

is received by a predetermined number of sensors that is greater than the minimum number of sensors required to obtain the geo-location estimate. The improvement may include incorporating bias error in the signals received at the sensors and updating the geo-location estimate by recursive analysis of the bias error to thereby refine the geo-location estimate.

[0017] It is still an object of the present subject matter to present a method for estimating the geo-location of a wireless transmitter emitting a signal that is received by a plurality of sensors in a geo-location system which includes a geo-location estimation device which provides an overdetermined geo-location solution for the wireless transmitter. The method includes measuring an attribute of the emitted signal to thereby create a sensor signal at the sensor and sending the sensor signal to the geo-location estimation device. The method may also include receiving the plural sensor signals, associating with each sensor signal a separate initial predetermined weight value to thereby provide a plurality of initial estimation signals, determining an initial estimate of the geo-location of the wireless transmitter from the initial estimation signals, and modifying the weight value associated with the dominant sensor signals relative to the weight value associated with the non-dominant sensor signals to thereby provide a plurality of refined estimation signals.

[0018] It is another object of the present subject matter to present a novel method for estimating the geo-location of a wireless transmitter emitting a signal that is received by a plurality of sensors in a geo-location system which includes a geo-location estimation device which provides an overdetermined geo-location solution for the wireless transmitter as a function of sensor signals determined from an attribute of the received signal at the plurality of sensors.

[0019] It is yet another object of the present subject matter to present a novel system for estimating the geo-location of a wireless transmitter emitting a signal that is received by a plurality of sensors in a geo-location system which further includes a geo-location estimation device which provides an overdetermined geo-location solution for

GRA26 006

the wireless transmitter as a function of sensor signals determined from an attribute of the received signal at the plurality of sensors.

[0020] These and other advantages of the disclosed subject matter over the prior art will be readily apparent to one skilled in the art to which the disclosure pertains from a perusal of the claims, the appended drawings, and the following detailed description of the preferred embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] Figure 1 is an illustration of the elements used to estimate a location in a TOA geolocation system according to an embodiment of the disclosed subject matter.

[0022] Figure 2 is an illustration of the elements used to estimate a location in a AOA geolocation system according to an embodiment of the disclosed subject matter.

[0023] Figure 3 is a flow chart representing an embodiment of the disclosed subject matter.

DETAILED DESCRIPTION

[0024] A mathematical description follows to aid in the description of the current subject matter. The set of measurements from the receiving stations is denoted by \bar{m} . These measurements are determined from an attribute of the received signal from the mobile emitter. The receiving stations are typically sensors co-located with base stations in a wireless communication system. The sensors can also be located at repeater stations within the communication system or remotely located. The elements of this column vector \bar{m} are the individual measurements, possibly of several different types, such as TOA, TDOA or AOA, FDOA etc. Each component in the vector is associated with one or more of the receiving stations j , where j denotes (indexes) the station. The self and inter-relationships between the measurements are denoted by the weight matrix W_k where k denotes the iteration number; k is equal to unity at the outset and increases in

GRA26 006

steps of 1 at each iteration. The matrix formulation is adopted for simplicity since the actual inter-relationships between the measurements could have a more complex form. In the simplest case, the weight matrix \mathbf{W}_k is a diagonal matrix expressing the variance associated with individual measurements.

[0025] The emitter location estimate is denoted by \hat{P}_k , and the receiving station locations are denoted by the column vector \vec{s} . The emitter location estimate is given as:

$$[0026] \quad \hat{P}_k = f(\vec{s}, \vec{m}, \mathbf{W}_k); k = 1, 2, 3, \dots \quad (1)$$

Thus the location estimate is a function of receiving station locations, measurements and weights. The subscript k denotes the iteration number.

[0027] Here, $f(\vec{s}, \vec{m}, \mathbf{W}_k)$ is the function used to generate a location estimate given the set of measurements and their self and inter-relationships. Depending on the approach taken, $f(\vec{s}, \vec{m}, \mathbf{W}_k)$ could be one of many different functions. For example, any one of the functions expressing the location estimate in terms of the sensor positions and the measurements as described in the prior art may be used.

[0028] It is clear that the established methods encapsulated by equation (1) need to use a particular weight matrix. In our formulation, the initial weight matrix \mathbf{W}_1 , is a known weight matrix which can be predetermined based on prior knowledge or attributes of the received signals such as the Signal to Noise Ratio (SNR), or even in the most trivial case, an identity matrix. The initial location (\hat{P}_1) may be derived from an explicit solution such as in the prior art solutions discussed previously or derived using a specific algorithm satisfactory to the practitioner of this art.

[0029] Methods embodying the disclosed subject matter iteratively update or modify the weight matrix in accordance with:

$$[0030] \quad \mathbf{W}_{k+1} = g(\mathbf{W}_k, \vec{s}, \vec{m}, \hat{P}_k); k = 1, 2, 3, \dots \quad (2)$$

GRA26 006

where the function $g(\mathbf{W}_k, \bar{s}, \bar{m}, \hat{P}_k)$ modifies the weight matrix depending on the agreement between the individual measurements in \bar{m} , the receiving station locations S_j and the emitter location estimate at the k^{th} step, \hat{P}_k .

[0031] Equation (2) summarizes the general approach embodied by the disclosed subject matter. To provide more detail for a particular case, an embodiment of a location system using only TOAs is illustrated.

[0032] Figure 1 is a representation of a geolocation system using TOA, showing the respective elements of equation (1). The receiving stations are designated as 101-104, the actual mobile emitter location \bar{P} is shown as 110 while the estimated mobile emitter location at recursion or iteration k , \hat{P}_k , is shown as 111.

[0033] Let the sensor locations be denoted by S_j , where $j=1, 2, \dots, N$; N denoting the number of sensors; in Figure 1, $N=4$.

[0034] An embodiment of equation (2) for this case is then:

$$[0035] \quad \mathbf{W}_{k+1} = \mathbf{W}_k + \alpha (\bar{m} - \mathbf{t}_k)(\bar{m} - \mathbf{t}_k)^T, \quad (3)$$

[0036] in which

$$[0037] \quad \mathbf{t}_k = (t_{1,k} \ t_{2,k} \ \dots \ t_{N,k})^T = (t_{1,k} \ t_{2,k} \ \dots \ t_{4,k})^T$$

[0038] where "T" denotes matrix transposition,

$$t_{j,k} = |S_j - \hat{P}_k|,$$

and α is a constant matrix which in its simplest form is a constant scalar times an identity matrix and can be theoretically or empirically determined or provided by the geo-location system operator as a fixed setting or in real time.

[0039] As a second illustration of the method, consider a scheme that uses only TDOAs. In this case a possible embodiment of equation (2) is

GRA26 006

[0040]
$$\mathbf{W}_{k+1} = \mathbf{W}_k + \alpha(\bar{\mathbf{m}} - \tau_k)(\bar{\mathbf{m}} - \tau_k)^T \quad (4)$$

[0041] where each element in $\bar{\mathbf{m}}$ denotes the TDOA measurements with respect to a particular receiving station pair,

[0042]
$$\tau_k = \mathbf{H} \mathbf{t}_k$$

[0043] the $(N - 1) \times (N)$ matrix \mathbf{H} is given by:

[0044]
$$\begin{bmatrix} 1 & 0 & 0 & \cdots & 0 & -1 \\ 0 & 1 & 0 & \cdots & 0 & -1 \\ \cdots & \cdots & \cdots & \cdots & \cdots & \cdots \\ 0 & 0 & 0 & \cdots & 1 & -1 \end{bmatrix}$$

and the same reference station (station N in this case) is used in the formation of the TDOA measurements.

[0045] A third embodiment of equation (2) is shown in Figure 2, where the location estimation scheme uses AOA. In this case a possible embodiment of equation (2) is

[0046]
$$\mathbf{W}_{k+1} = \mathbf{W}_k + \alpha(\bar{\mathbf{m}} - \gamma_k)(\bar{\mathbf{m}} - \gamma_k)^T \quad (5)$$

[0047] where each element in $\bar{\mathbf{m}}$ denotes the AOA measurement with respect to a particular receiving station, and

$$\gamma_{kj} = \tan^{-1} \left(\frac{(\hat{P}_{ky} - S_{jy})}{(\hat{P}_{kx} - S_{jx})} \right),$$

where subscripts x and y indicate the individual components along the x -axis and y -axis in a 2-dimensional coordinate scheme, j indexes the station and k indexes the iteration.

GRA26 006

[0048] It will be understood by those of skill in the art that although the above-described embodiments describe systems with four sensors, systems with other than four sensors are contemplated by the present subject matter consistent with the description herein.

[0049] Figure 3 shows a flow chart illustrating a typical implementation of the disclosed subject matter. Measurements or sensor data, where the latter is the precursor of the former along with an initial Weight matrix are supplied to block 310 where any of the prior art methods consistent with equation (1) are used to produce an initial fix. The initial fix or location estimate \hat{P}_1 along with the measurements or sensor data are supplied to block 320 where measurement offsets are determined. These offsets are used to update the weight matrix according to equation (2) in block 330. A new location estimate \hat{P}_k is generated with the updated or modified Weight matrix and the measurement m in block 340. The iterations continue until either the Position estimates converge as shown in block 350, or alternatively the iterations cease when some attribute of the Weight matrix converges.

[0050] The iteration process can be implemented at the geo-location estimation device or in a subsystem in operational communication with the geo-location device. The geo-location device is generally a processor that performs the mathematical manipulation of the signals from the sensors. The mathematical manipulation can be accomplished with hardware and /or software.

[0051] The technique of the current subject matter iteratively modifies the weight matrix W_k as expressed by equations (1) and (2) is functional over varying terrain, different receiving station configurations, and over widely varying cellular protocols.

[0052] While preferred embodiments of the present inventive system and method have been described, it is to be understood that the embodiments described are illustrative only and that the scope of the embodiments of the present inventive system and method is to be defined solely by the appended claims when accorded a full range of

GRA26 006

equivalence, many variations and modifications naturally occurring to those of skill in the art from a perusal hereof.

GRA26 006

What we claim is:

1. In a method for refining a geo-location estimate of a wireless transmitter emitting a signal that is received by a predetermined number of sensors that is greater than the minimum number of sensors required to obtain the geo-location estimate, wherein signals from the sensors used to estimate the location contain a bias error, the improvement comprising updating the geo-location estimate by recursive analysis of the bias error to thereby refine the geo-location estimate.
2. The method of Claim 1 wherein the predetermined number of sensors is four.
3. The method of Claim 1 wherein the received signals from the sensors are provided at a location estimation device.
4. The method of Claim 3 wherein the location estimation device determines the geo-location of the wireless transmitter by a method selected from the group consisting of time of arrival, time difference of arrival, frequency difference of arrival, and angle of arrival.
5. The method of Claim 3 wherein the location estimation device determines the geo-location of the wireless transmitter by a plurality of methods selected from the group consisting of time of arrival, time difference of arrival, frequency of arrival, and angle of arrival.

GRA26 006

6. A method for estimating the geo-location of a wireless transmitter emitting a signal that is received by a plurality of sensors in a geo-location system which further includes a geo-location estimation device which provides an overdetermined geo-location solution for the wireless transmitter, comprising the steps of:

- (a) at the sensors:
 - (i) measuring an attribute of the emitted signal to thereby create a sensor signal; and
 - (ii) sending the sensor signal to the geo-location estimation device;
- (b) at the geo-location estimation device:
 - (i) receiving the plural sensor signals;
 - (ii) associating with each sensor signal a separate initial predetermined weight value to thereby provide a plurality of initial estimation signals;
 - (iii) determining an initial estimate of the geo-location of the wireless transmitter from the initial estimation signals;
 - (iv) modifying the weight value associated with the dominant sensor signals relative to the weight value associated with the non-dominant sensor signals to thereby provide a plurality of refined estimation signals;
 - (v) determining a refined estimate of the geo-location of the wireless transmitter from the refined estimation signals;
 - (vi) repeating steps (b)(iv) through (b)(v) a predetermined number of times to thereby estimate the geo-location of the wireless transmitter.

7. The method of Claim 6 wherein the plurality of sensors is at least four.

8. The method of Claim 6 wherein the attribute of the emitted signal is selected from the group consisting of time of arrival, frequency, phase, and angle of arrival.

GRA26 006

9. The method of Claim 6 wherein for step (b)(ii) the determination of the initial predetermined weight values comprises the following steps:

- (A) determining a theoretical geo-location of the wireless transmitter based on the plural sensor signals;
- (B) determining for each one of the plural sensor signals the initial predetermined weight value as a function of the distance between the theoretical geo-location and the closest point of approach of a hypothetical curve based on said one plural sensor signal.

10. The method of Claim 6 wherein steps (b) (iv) through (b) (vi) are repeated until the change in the refined estimate of the geo-location of the wireless transmitter from the previous iteration is less than a predetermined amount.

11. The method of Claim 6 wherein the estimate of the geo-location of the wireless transmitter is determined by a method selected from the group consisting of time of arrival, time difference of arrival, frequency difference of arrival, and angle of arrival.

12. The method of Claim 6 wherein the estimate of the geo-location of the wireless transmitter is determined by a plurality of methods selected from the group consisting of time of arrival, time difference of arrival, frequency of arrival, and angle of arrival.

13. The method of Claim 6 wherein the predetermined weight value for each sensor signal is a function of a bias error for the sensor signal.

14. The method of Claim 13 wherein the bias error is a function of an instrumentation error.

15. The method of Claim 13 wherein the bias error for each sensor signal is a function of the receipt of a multi-path emitted signal at the sensor.

GRA26 006

16. A method for estimating the geo-location of a wireless transmitter emitting a signal that is received by a plurality of sensors in a geo-location system which further includes a geo-location estimation device which provides an overdetermined geo-location solution for the wireless transmitter, comprising the steps of:

- (a) providing a sensor signal for each of the plurality of sensors as a function of an attribute of the received signal at the respective sensor;
- (b) providing an initial weight value for each sensor signal;
- (c) estimating the initial geo-location of the wireless transmitter as a function of the sensor signals and the respective initial weight values;
- (d) determining the offset of each sensor signal from the estimated initial geo-location;
- (e) updating the weight value for at least one of the sensor signals as a function of the offset for the respective sensor signal;
- (f) estimating the updated geo-location of the wireless transmitter as a function of the sensor signals and the respective updated weight values;
- (g) determining the offset of each sensor signal from the updated geo-location;
- (h) repeating steps (e) through (g) a predetermined number of times to thereby estimate the geo-location of the wireless transmitter.

17. The method of Claim 16 wherein the plurality of sensors is at least four.

18. The method of Claim 16 wherein the attribute of the emitted signal is selected from the group consisting of time of arrival, frequency, phase, and angle of arrival.

GRA26 006

19. The method of Claim 16 wherein steps (e) through (g) are repeated until the change in the updated estimate of the geo-location of the wireless transmitter from the previous iteration is less than a predetermined amount.

20. The method of Claim 16 wherein steps (e) through (g) are repeated until the change in the updated weight values from the previous iteration is less than a predetermined amount.

21. The method of Claim 16 wherein the estimate of the geo-location of the wireless transmitter is determined by a method selected from the group consisting of time of arrival, time difference of arrival, frequency difference of arrival, and angle of arrival.

22. The method of Claim 16 wherein the estimate of the geo-location of the wireless transmitter is determined by a plurality of methods selected from the group consisting of time of arrival, time difference of arrival, frequency of arrival, and angle of arrival.

23. The method of Claim 16 wherein the predetermined weight value for each sensor signal is a function of a bias error for the sensor signal.

24. The method of Claim 23 wherein the bias error is a function of an instrumentation error.

25. The method of Claim 23 wherein the bias error for each sensor signal is a function of the receipt of a multi-path emitted signal at the sensor.

26. The method of Claim 16 wherein the initial weight values are expressed in a matrix.

27. The method of Claim 26 wherein the initial geo-location estimate is also a function of the location of the plurality of sensors.

28. The method of Claim 26 wherein the step of updating the weight value matrix in step (e) is also a function of the location of the plurality of sensors.

GRA26 006

29. A method for estimating the geo-location of a wireless transmitter emitting a signal that is received by a plurality of sensors in a geo-location system which further includes a geo-location estimation device which provides an overdetermined geo-location solution for the wireless transmitter as a function of sensor signals determined from an attribute of the received signal at the plurality of sensors, comprising the steps of:

- (a) assigning a weight value for each sensor signal;
- (b) estimating the geo-location of the wireless transmitter as a function of the sensor signals and the weight values assigned to the sensor signals;
- (c) determining the offset of each received signal from the estimated geo-location;
- (d) updating the weight value for at least one of the sensor signals as a function of the offset for the respective sensor signal;
- (e) repeating steps (b) through (d) a predetermined number of times to thereby estimate the geo-location of the wireless transmitter.

30. The method of Claim 29 wherein the plurality of sensors is at least four.

31. The method of Claim 29 wherein the attribute of the emitted signal is selected from the group consisting of time of arrival, frequency, phase, and angle of arrival.

GRA26 006

32. The method of Claim 29 wherein steps (b) through (d) are repeated until the change in the estimate of the geo-location of the wireless transmitter from the previous iteration is less than a predetermined amount.

33. The method of Claim 29 wherein steps (b) through (d) are repeated until the change in the weight values from the previous iteration is less than a predetermined amount.

34. The method of Claim 29 wherein the estimate of the geo-location of the wireless transmitter is determined by a method selected from the group consisting of time of arrival, time difference of arrival, frequency difference of arrival, and angle of arrival.

35. The method of Claim 29 wherein the estimate of the geo-location of the wireless transmitter is determined by a plurality of methods selected from the group consisting of time of arrival, time difference of arrival, frequency of arrival, and angle of arrival.

36. The method of Claim 29 wherein the weight value for each sensor signal is a function of a bias error for the sensor signal.

37. The method of Claim 36 wherein the bias error is a function of an instrumentation error.

38. The method of Claim 36 wherein the bias error for each sensor signal is a function of the receipt of a multi-path emitted signal at the sensor.

39. The method of Claim 29 wherein the weight values are expressed in a matrix.

40. The method of Claim 39 wherein the geo-location estimate is also a function of the location of the plurality of sensors.

41. The method of Claim 39 wherein the step of updating the weight value matrix in step (e) is also a function of the location of the plurality of sensors.

GRA26 006

42. A system for estimating the geo-location of a wireless transmitter emitting a signal that is received by a plurality of sensors in a geo-location system which further includes a geo-location estimation device which provides an overdetermined geo-location solution for the wireless transmitter as a function of sensor signals determined from an attribute of the received signal at the plurality of sensors, comprising:

- (a) means for assigning a weight value for each sensor signal;
- (b) means for estimating the geo-location of the wireless transmitter as a function of the sensor signals and the weight values assigned to the sensor signals;
- (c) means for determining the offset of each received signal from the estimated geo-location;
- (d) means for updating the weight value for at least one of the sensor signals as a function of the offset for the respective sensor signal;
- (e) means for repeating steps (b) through (d) a predetermined number of times to thereby estimate the geo-location of the wireless transmitter.

43. The system of Claim 42 wherein the plurality of sensors is at least four.

44. The system of Claim 42 wherein the attribute of the emitted signal is selected from the group consisting of time of arrival, frequency, phase, and angle of arrival.

GRA26 006

45. The system of Claim 42 wherein steps (b) through (d) are repeated until the change in the estimate of the geo-location of the wireless transmitter from the previous iteration is less than a predetermined amount.

46. The system of Claim 42 wherein steps (b) through (d) are repeated until the change in the weight values from the previous iteration is less than a predetermined amount.

47. The system of Claim 42 wherein the estimate of the geo-location of the wireless transmitter is determined by a method selected from the group consisting of time of arrival, time difference of arrival, frequency difference of arrival, and angle of arrival.

48. The system of Claim 42 wherein the estimate of the geo-location of the wireless transmitter is determined by a plurality of methods selected from the group consisting of time of arrival, time difference of arrival, frequency of arrival, and angle of arrival.

49. The system of Claim 42 wherein the weight value for each sensor signal is a function of a bias error for the sensor signal.

50. The system of Claim 49 wherein the bias error is a function of an instrumentation error.

51. The system of Claim 49 wherein the bias error for each sensor signal is a function of the receipt of a multi-path emitted signal at the sensor.

52. The system of Claim 42 wherein the weight values are expressed in a matrix.

53. The system of Claim 52 wherein the geo-location estimate is also a function of the location of the plurality of sensors.

54. The system of Claim 52 wherein the step of updating the weight value matrix in step (e) is also a function of the location of the plurality of sensors.

55. In a method for identifying bias measurements in a geo-location estimate of a wireless transmitter emitting a signal that is received by a predetermined number of sensors that is greater than the minimum number of sensors required to obtain the geo-location estimate, wherein measurements from the sensors used to estimate the location contain a bias error, the improvement comprising updating the geo-location estimate by recursive analysis of the bias error to thereby identify bias measurements.

56. The method of Claim 23 wherein the bias error for each sensor signal is a function of the RF propagation channel between the transmitter and the sensors.

GRA26 006

57. The method of Claim 13 wherein the bias error for each sensor signal is a function of the RF propagation channel between the transmitter and the sensors.

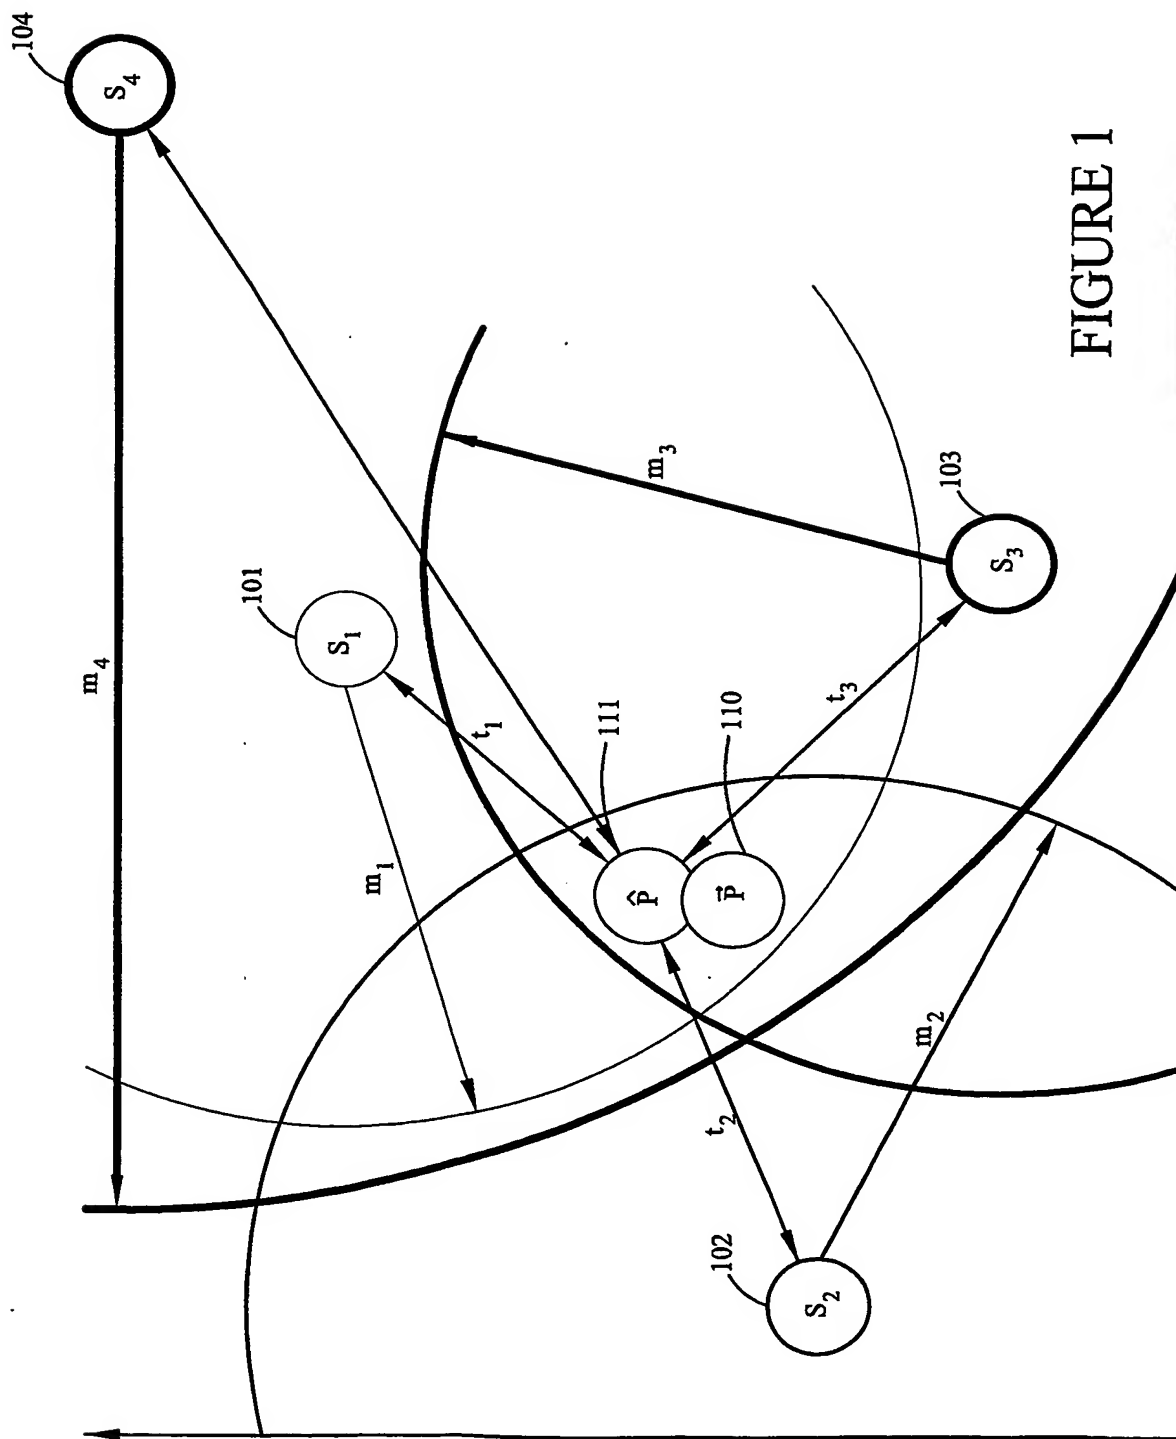


FIGURE 1

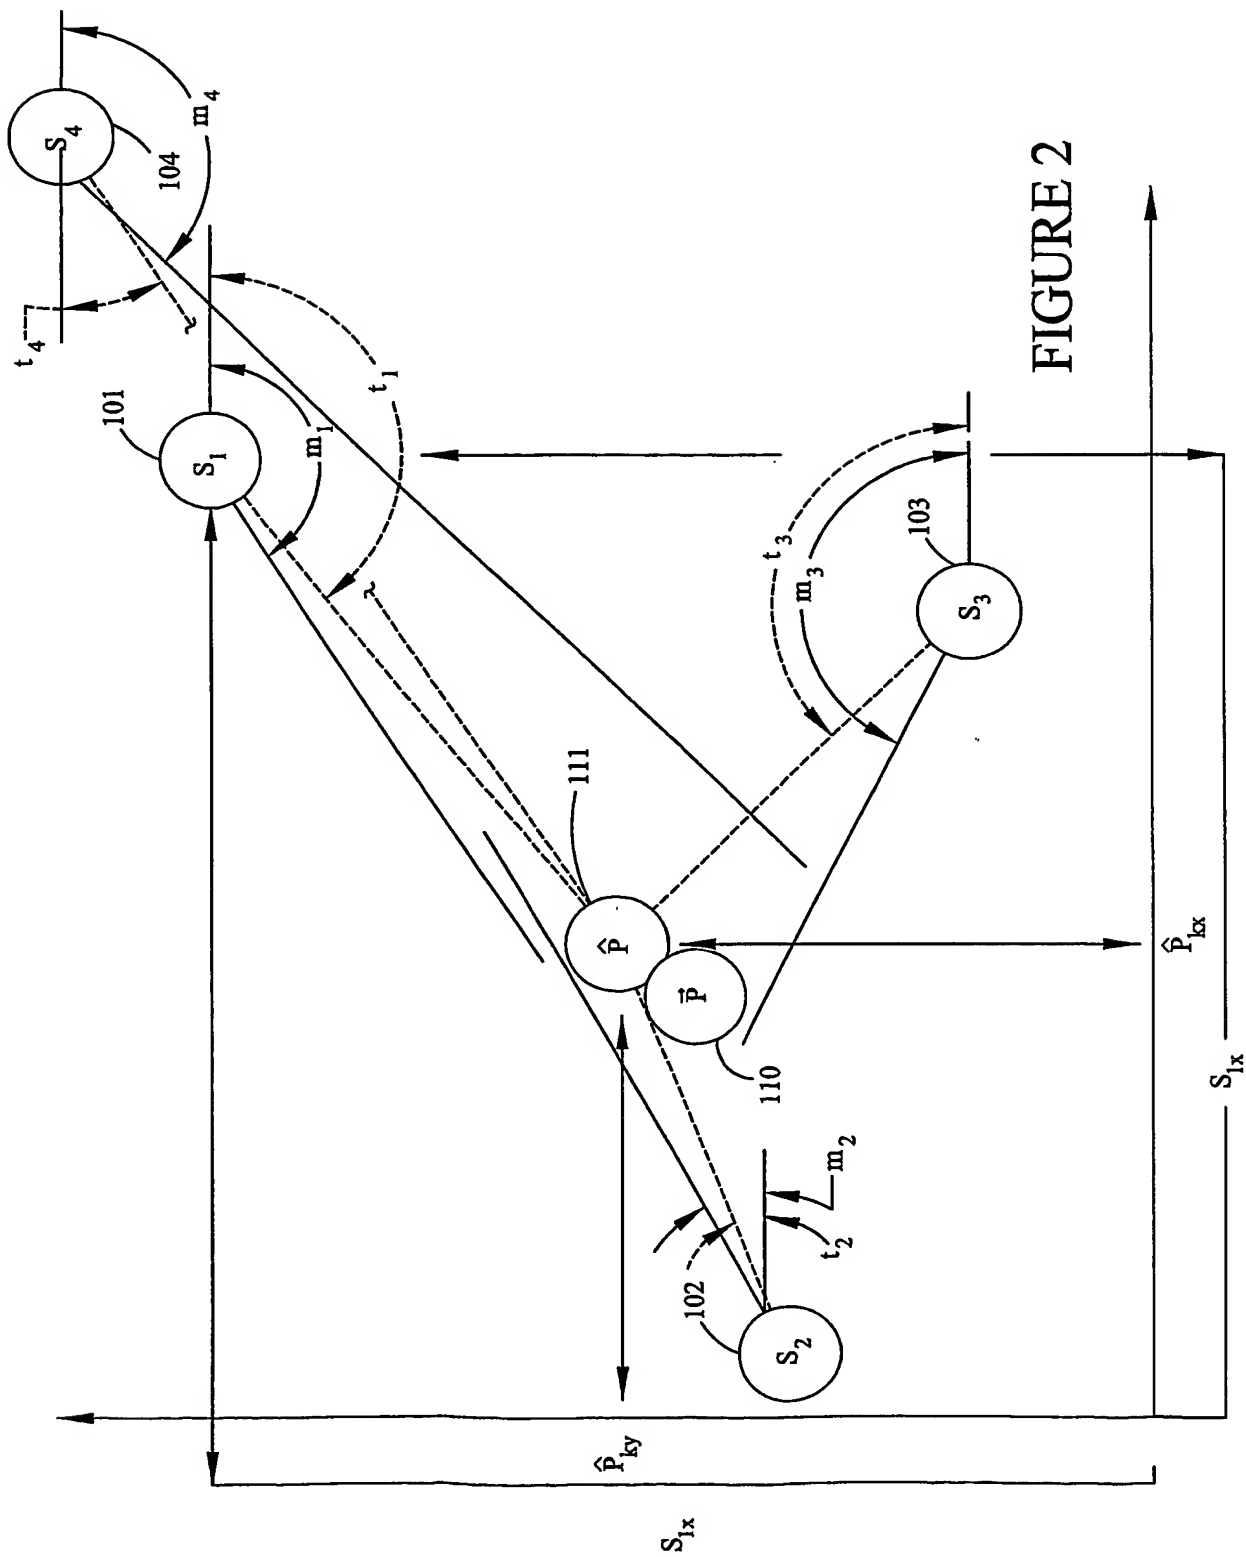


FIGURE 2

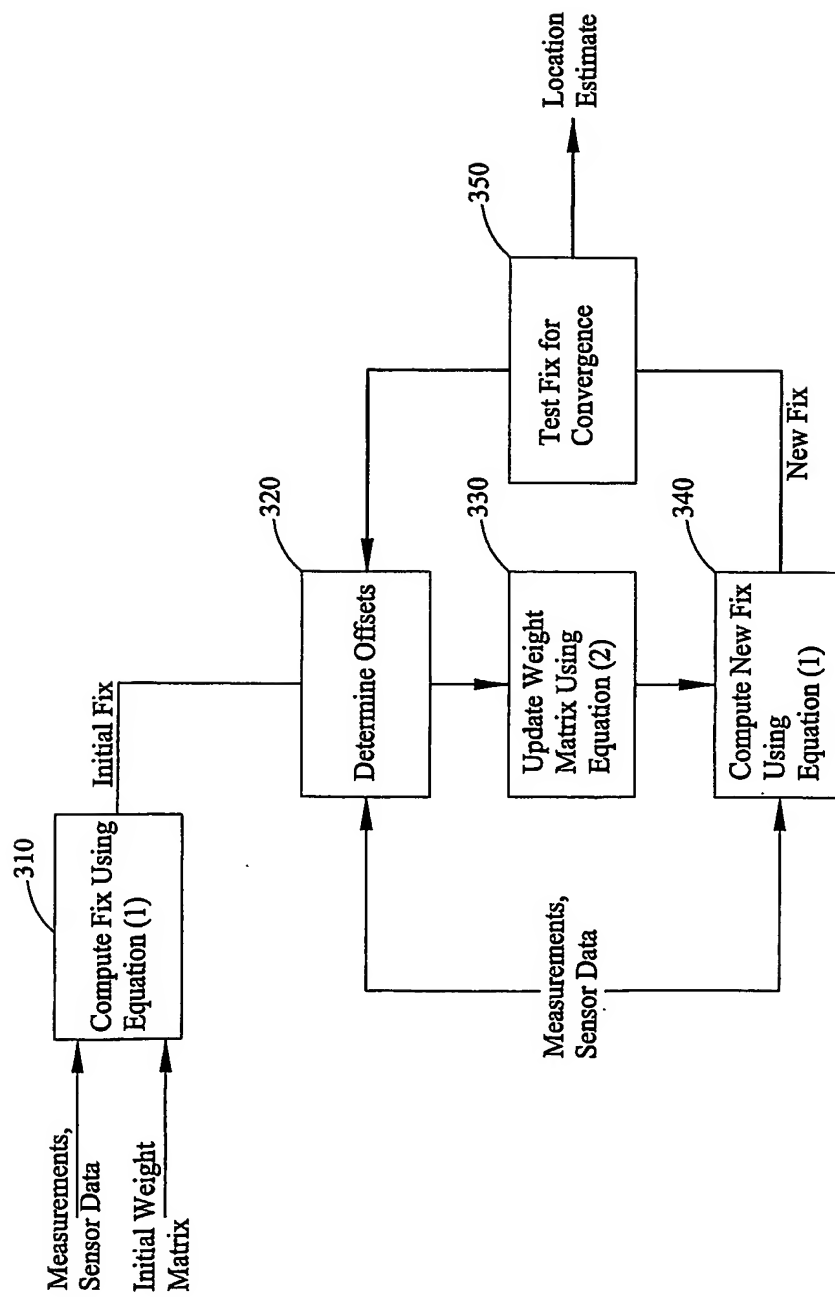


FIGURE 3

12 APR 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/036924 A3


- (51) International Patent Classification⁷: G01S 3/02
- (21) International Application Number: PCT/US2003/032584
- (22) International Filing Date: 16 October 2003 (16.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/418,342 16 October 2002 (16.10.2002) US
- (71) Applicant (for all designated States except US): ANDREW CORPORATION [US/US]; 13595 Dulles Technology Drive, Suite 200, Herndon, VA 20171 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): CARLSON, John, P. [US/US]; 12006 Trossack Road, Herndon, VA 20170 (US). ALLES, Martin [US/US]; 2421 Williams Avenue, Vienna, VA 22180 (US). KENNEDY, Joseph, P., Jr. [US/US]; 11127 Elmview Place, Great Falls, VA 22066 (US). GRAVELY, Thomas, B. [US/US]; 11693 Hanna Overlook Court, Herndon, VA 20170 (US).
- (74) Agent: COMTOIS, Mark, C.; Duane Morris LLP, Suite 700, 1667 K Street, N.W., Washington, DC 20006 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: ENHANCING THE ACCURACY OF A LOCATION ESTIMATE

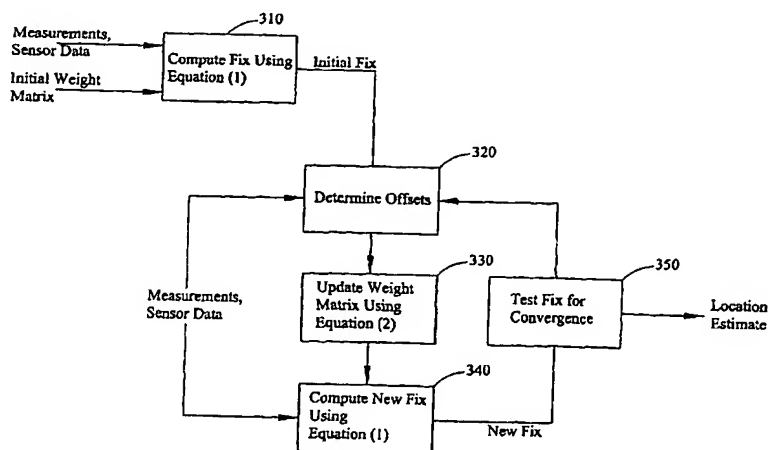

(57) Abstract: A method for enabling a system to enhance the accuracy of a location estimate modifies weights in a weight matrix associated with receiver station measurements in parallel with successive refinements of the location estimate. In a typical location estimation scenario, several receiving stations simultaneously derive measurements of a signal from the emitter. Any one of these measurements is in general some function of the emitter location and the receiving station location. The aggregate of these measurements is often in excess of the minimum number of measurements required to provide an estimate of the emitter location. Where such an excess exists, the method proceeds by modifying the weights (330) associated with the measurements in parallel with successive refinements of the location estimate. The method can be implemented over various cellular protocols with a consistent and significant enhancement in the accuracy of location estimates.

WO 2004/036924 A3

WO 2004/036924 A3



(88) Date of publication of the international search report:
30 June 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/32584

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G01S 3/02
US CL : 342/457, 463, 465

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
U.S. : 342/357.02, 450, 457, 463, 465; 455/456.2, 457

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
East Text Search

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| X | US 2002/0111717 A1 (Scherzinger et al) 15 August 2002 (15.08.02) Fig. 1, 2, 6 and 7 | 1-5, 55 |
| X | US 4,783,744 (Yneh) 08 November 1988 (08.11.88) Fig. 2, 5 and 6 | 1-5, 55 |
| X, P | US 6,553,322 (Ignagni) 22 April 2003 (22.04.03) Fig. 3 and 5 | 1-5, 55 |

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

| | |
|---|--|
| * Special categories of cited documents: | |
| "A" document defining the general state of the art which is not considered to be of particular relevance | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| "E" earlier application or patent published on or after the international filing date | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "O" document referring to an oral disclosure, use, exhibition or other means | "&" document member of the same patent family |
| "P" document published prior to the international filing date but later than the priority date claimed | |

Date of the actual completion of the international search

04 April 2005 (04.04.2005)

Date of mailing of the international search report


18 MAY 2005

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Dao L. Phan 

Telephone No. 703-306-4167

Copy for the designated Office (DO/EP)
PATENT COOPERATION TREATY

PCT/US2003/032584

31

PCT

From the INTERNATIONAL BUREAU

NOTIFICATION OF THE RECORDING
OF A CHANGE

(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

To:

COMTOIS, Mark, C.
Duane Morris LLP
Suite 700
1667 K Street, N.W.
Washington, DC 20006
United States of America

| | |
|--|-------------------------------|
| Date of mailing (day/month/year) 28 May 2004 (28.05.2004) | IMPORTANT NOTIFICATION |
| Applicant's or agent's file reference GRA26 006 PCT | |
| International application No. PCT/US2003/032584 | |
| International filing date (day/month/year) 16 October 2003 (16.10.2003) | |

1. The following indications appeared on record concerning:

☒ the applicant ☒ the inventor ☐ the agent ☐ the common representative

| | | |
|---|----------------------------|--------------------------|
| Name and Address CARLSON, John, P. ALLES, Martin KENNEDY, Joseph, P., Jr. GRAVELY, Thomas, B. | State of Nationality US | State of Residence US |
| | Telephone No. | |
| | Facsimile No. | |
| | Teleprinter No. | |

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person ☐ the name ☐ the address ☐ the nationality ☐ the residence

| | | |
|------------------|----------------------|--------------------|
| Name and Address | State of Nationality | State of Residence |
| | Telephone No. | |
| | Facsimile No. | |
| | Teleprinter No. | |

3. Further observations, if necessary:

Change of the listing order of the inventors/applicants for US as indicated in Box 1.

4. A copy of this notification has been sent to:

☒ the receiving Office ☒ the designated Offices concerned
☐ the International Searching Authority ☐ the elected Offices concerned
☐ the International Preliminary Examining Authority ☐ other:

| | |
|--|--|
| The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 338.89.70 | Authorized officer Elisabeth KÖNIG (Fax 338 8970) Telephone No. (41-22) 338 8748 |
|--|--|